
## Pedestrian Stacker with driver platform



## **PSP 125STV**

Robust, ergonomic, powerful and highly manoeuvrable pedestrian stacker with foldable platform and advanced safety features. Ideal for the warehouse and when equipped with the option straddle lift suitable for double pallet handling. Side protection bars, electrical power steering and driver protected platform available as option.

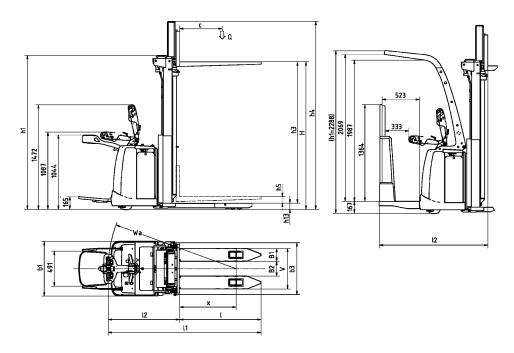

Mast type	Lift height H	Height of mast lowered h1	Max mast height h4
Standard/Duplex	2690 2990 3290 3590 4190	1845 1995 2150 2300 2600	3110 3410 3710 4010 4610
Triplex			



_	1.2	Manufacturer's type designation			F3F 12331 V
DG	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas			Electric
<u> </u>	1.4	Operator type: hand, pedestrian, standing, seated, order-picker			Pedestrian
Distinguishing mark	1.5	Load capacity/rated load	Q	t	1,25
E β E	1.6	Load centre distance	C	mm	400-600
iti.	1.8	Load distance, centre of load axle to fork	X	111111	750
ĕ	1.9	Wheelbase	у	mm	1412
_	2.1	Service weight incl battery	у		1267*
±	2.2	Axle load, with load, front/rear		kg	1095 / 1432
l g				kg	
Weight	2.3	Axle load, without load, front / rear		kg	889 / 378
>	2.4	Axle load, fork outreached with load, front / rear		kg	
	2.5	Axle load, fork retracted with load, front / rear		kg	David and /Dahamathana
.8	3.1	Tyres			Powerthane/Polyurethane
138	3.2	Tyre size, drive side		mm	230*70
Tyres, chassis	3.3	Tyre size, load side		mm	85*99
	3.4	Dimensions additional wheels (castor wheels)		mm	140*60
es	3.5	Wheels, number front/rear (drive side/load side, x = driven wheels)			1x +1/2
_ ,5	3.6	Track, drive side	b10	mm	501
-	3.7	Track, load side	b11	mm	380
	4.1	Tilt of mast/fork carriage, forward/backward		Grad	
	4.2	Height, mast lowered	h1	mm	See table
	4.3	Free lift	h2	mm	80
	4.4	Lift height H = h13+h3	Н	mm	See table
	4.5	Height, mast extended	h4	mm	See table
	4.6	Straddle lift	h5	mm	
	4.7	Height of overhead guard (cabin)	h6	mm	2288
	4.8	Seat height/stand height	h7	mm	165
	4.10	Height of wheel arms	h8	mm	82
	4.11	Additional lift	h9	mm	
	4.14	Stand height, elevated	h12	mm	
	4.15	Height lowered	h13	mm	90
	4.19	Overall length	11	mm	2107
	4.20	Length to face of forks	12	mm	907
SC	4.21	Overall width	b1	mm	770
<u>ö</u> .	4.21.1	Width over stabilizers		mm	
ns	4.22	Fork dimensions	s/e/l	mm	65/180 / 1200, 1000
Je	4.23	Fork carriage to ISO 2328, clas / form A, B			,
Dimensions	4.24	Width of fork carriage	b3	mm	590
	4.25	Width over forks, min/max	b5	mm	570
	4.26	Distance between wheel arms	b4	mm	210
	4.27	Width across guide rolls	b6	mm	
	4.28	Reach distance	14	mm	
	4.29	Reach lateral	b7	mm	
	4.30	Reach lateral from vehicle centerline	b8	mm	
	4.31	Ground clearance, mast	m1	mm	28
	4.32	Ground clearance, centre of wheelbase	m2	mm	28
	4.33	Aisle width with pallet 1000 x 1200, crosswise	Ast	mm	2526 / 2909
	4.34	Aisle width for pallet 800 x 1200, lenghtwise	Ast	mm	2479 / 2862
		Transfer aisle	0	mm	211012002
	4.35	Turning radius	Wa	mm	1675 / 2058
	4.37	Length incl reach legs	17	mm	10/3/2030
	4.38	Distance to swivelling-fork pivot	0	mm	
	5.1	Travel speed, with/without load		km/h	5,6 / 5.6
m.	5.1.1	Travel speed with/without load, backwards		km/h	5.6 / 5.6
ate	5.2				0,13 / 0,26
Performance data	5.2	Lift speed, with/without load  Lowering speed, with/without load		m/s m/s	0,13 / 0,26
	5.4				0,33 / 0,21
		Reach speed, with / without load		m/s	
	5.7	Gradient, with/without load		%	7.0
	5.8	Max gradeability, with / without load, 5 min rating		%	7,9
	5.9	Acceleration time 0-10 m, with/without load		S	7,9 / 7,5
Ф.	5.10	Service brake: electric, hydraulic			El drive motor
Electric	5.10.1	Parking brake: electric, hydraulic		1.147	Electric
	6.1	Drive motor, rating S2 60 min		kW	1,3
	6.2	Lift motor	4.5.5	kW	1,0
	6.3	Battery according to DIN 43531/35/36	A,B,C	\$ //A I	04 (000 400
	6.4	Battery voltage / Battery capacity		V/Ah	24 / 220-400
	6.5	Battery weight		kg	250 - 370*
	6.6	Power consumption according to VDI cycle		kWh/h	
<u>a</u>	8.1	Speed regulation			Combi AC
a	10.1	Operating pressure attachments		bar	
ditior	10.2	Oil flow for attachments		I/min	62,8
		National and an arrange and a second and a FNI 40 050		db(A)	
Additional data	10.7	Noise level at operator's ear, according to EN 12 053		db(A)	

<sup>\*</sup> Varies according to battery size